



- Industry 4.0 adopted Tablet caliper with computerized MICS system with 2.4" color Touchscreen
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- E-Force control module with Force selection 1-20N, color indication, AUTO-Force mode, Force indication
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Top quality Aluminium housing (CNC machined solid block)
- Calibration certificate included (ISO17025 (Ilac MRA))

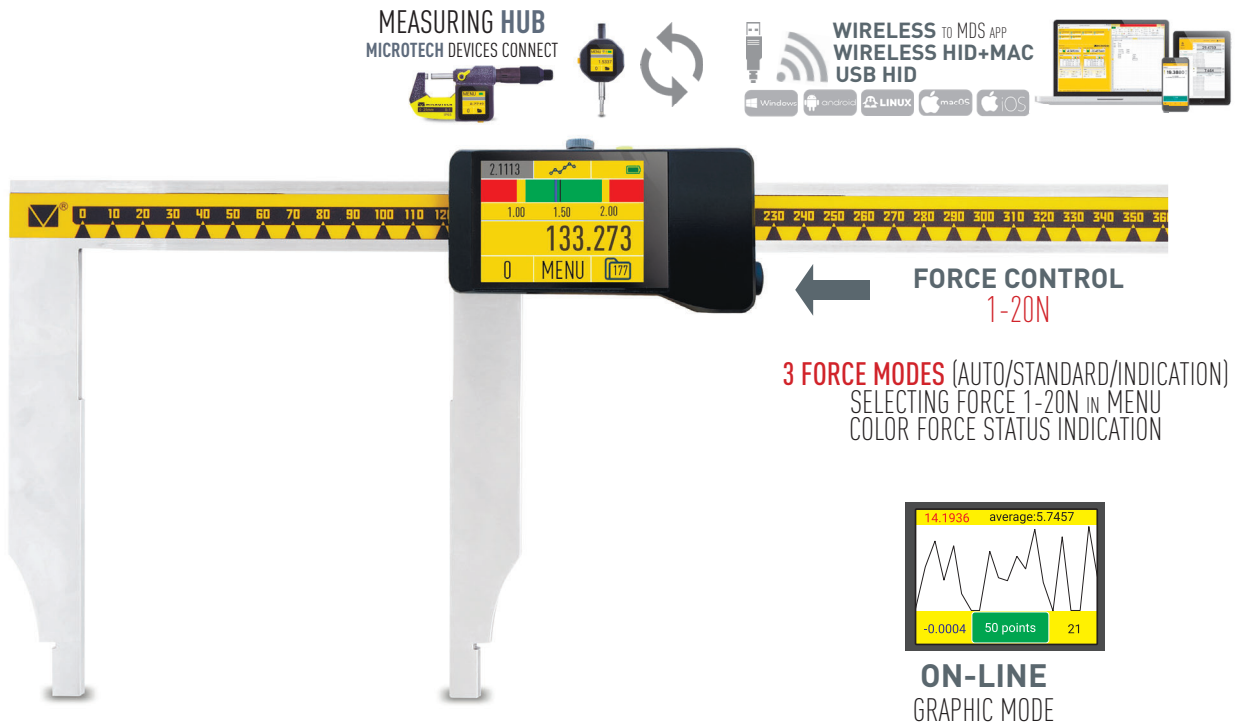

Item No	Range		Resol.	Jaws	Accuracy	eForce	Measuring HUB	Analog scale	Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB HID	FW update	Display						
	mm	inch																						mm	mm	µm	N		
141005216	0-500	0-20"	0,01	100	±30	1-20	•	•	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	•	•	Touchscreen 2.4"						
141005226				150	±30		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141005256				300	±30		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141006216	0-630	0-25"		100	±30		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141010216				150	±40		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141010256				300	±50		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141015216	0-1500	0-60"		150	±50		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141015256				300	±60		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141020216				150	±50		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141020256	0-2000	0-80"		150	±50		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141025256				±60	•		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•		
141025256				0-2500	0-100"		±80	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•	•	
141030256	0-3000	0-120"		300	±90		•	•	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•	•	
141040256					0-4000		0-160"	±110	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•	•	•
141050256					0-5000		0-200"	±130	•	•	•	•	•	•	•	•	•	•			•	•		•	•	•	•	•	•

OPTIONAL ACCESSORIES



DOWNLOAD APP



TABLET EXTRA LONG JAW CALIPER


- Industry 4.0 adopted Extra long jaw Tablet caliper with computerized MICS system with 2.4" color Touchscreen
- Patents US10184772, UA111194, UA112361, UA121681, UA2022205040
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Aluminium construction with precision linear guides
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- 4 MODES DATA TRANSFER: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



WIRELESS TO MDS APP
WIRELESS HID+MAC
USB HID

Windows Android LINUX macOS iOS

ROLL SLIDING SYSTEM
- Light aluminium base
- 2x steel roll for easy sliding



ON-LINE GRAPHIC MODE

CUSTOM RANGE AND JAWS FOR REQUEST

Item No	Range		Resol.	Jaws	Accu- racy	Weight	Measuring HUB	Analog scale	Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB HID	FW update	Display		
	mm	inch																						mm	mm
142408442	0-800	0-32"	0,01	400	±30	3,9	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
142411442	0-1000	0-40'		400	±40	4,3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
142411462				600	±60	4,7	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142418442	0-1800	0-60"		400	±80	6.2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142418462				600	±100	6,6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142120142	0-2000	0-80"		400	±60	17,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142120162				600	±85	18,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142120102	0-2500	0-100"		1000	±120	19,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142125142				400	±90	20,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142125162	0-3000	0-120"		600	±105	20,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142125102				1000	±140	21,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142130142	0-3500	0-140"		400	±100	24,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142130162				600	±110	24,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142130102	0-3500	0-140"		1000	±160	25,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142135142				400	±120	26,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142135162	0-3500	0-140"		600	±160	27,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
142135102				1000	±240	28,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

DOWNLOAD APP

