

# MarCal 30 EWri-N / 30 EWR-N

## Digital Depth Gage

### FUNCTIONS 30 EWri-N

- ON/OFF
- AUTO-ON / OFF
- mm/inch
- LOCK function (key lock)
- RESET (set display to zero)
- PRESET (for entering a numerical value)
- DATA (data transmission)
- HOLD (storage of measured values)



30 EWri-N

### FUNCTIONS 30 EWR-N


- ON/OFF
- AUTO-ON / OFF
- mm/inch
- LOCK function (key lock)
- RESET (set display to zero)
- PRESET (for entering a numerical value)
- DATA (data transmission via connection cable)
- High contrast analog display
- Locking screw above
- Lapped guideway
- Measuring surfaces made of steel
- Slide and beam made of hardened stainless steel
- Immediate measurements due to the Reference System
- Raised guideway for the protection of the scale
- Excellent resistance against dust, coolants and lubricants
- Dirt wipers are integrated in the slide



30 EWR-N

### Application:


Measuring groove widths and distances between grooves

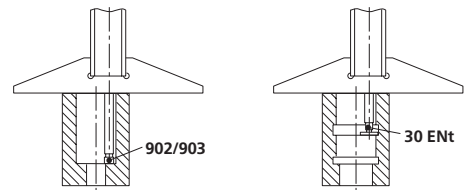

### TECHNICAL DATA

Order no.	Type	Measuring range		Numerical increment	Error limit		Standard
		mm	inch		mm	inch	
4126532	30 EWri-N	0 – 100	0 – 4"	0.01 / .0005"	0.03	.001"	Factory standard
4126513	30 EWR-N	0 – 100	0 – 4"	0.01 / .0005"	0.03	.001"	Factory standard

Order no.	a	b	c
	mm	mm	mm
4126532	268	85	16
4126513	268	85	16

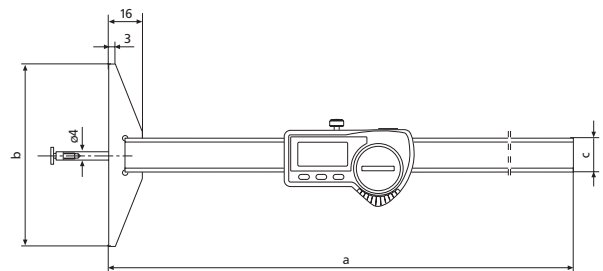

### FEATURES 30 EWri-N

- **Digit height:** 11mm
- **Data interface:** Integrated wireless
- **Energy supply:** Battery life approx. 3 years (approx. 0.5 in wireless mode)
- **IP protection category:** IP 67
- **Package contains:** battery, instruction manual, anvils 30 Ent (1mm), 902 (4mm) and 903 (4mm), case

### FEATURES 30 EWR-N

- **Digit height:** 8.5mm
- **Data interface:** USB, RS232C, Digimatic
- **Energy supply:** Battery life approx. 3 years