



- Double Force control module with 8N external and 4N internal FORCE (Patents US10429165, UA146381)
- Waterproof IP67 Swiss electronics with 0.01 or 0.001mm resolution
- High accuracy up to $\pm 5\mu\text{m}$ on external jaws (internal and depth according ISO13385)
- Calibration certificate included (ISO17025 (Iac MRA))

MICRON DOUBLE FORCE CALIPER IP67

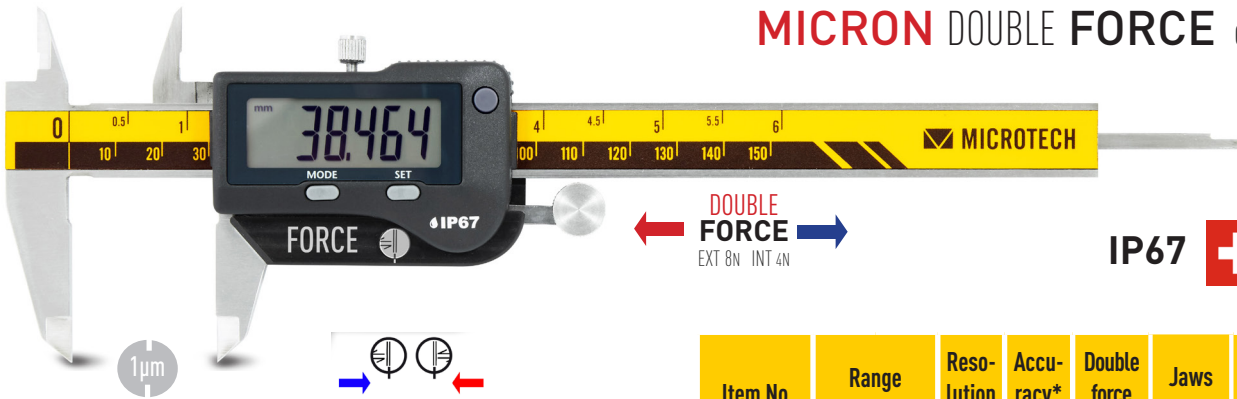


DOUBLE FORCE
EXT 8N INT 4N

IP67  **SWISS ELECTRONICS**




Item No	Range		Reso- lution	Accu- racy*	Double force	Jaws	Protection	Preset	mm/inch	Auto on/off
	mm	inch								
141079122	0-150	0-6"		± 5	8 ext	40/16		•	•	•
141079222	0-200	0-8"	0,001	± 8		50/17	IP-67	•	•	•
141079322	0-300	0-12"		± 10	4 int	60/20		•	•	•

DOUBLE FORCE CALIPER IP67

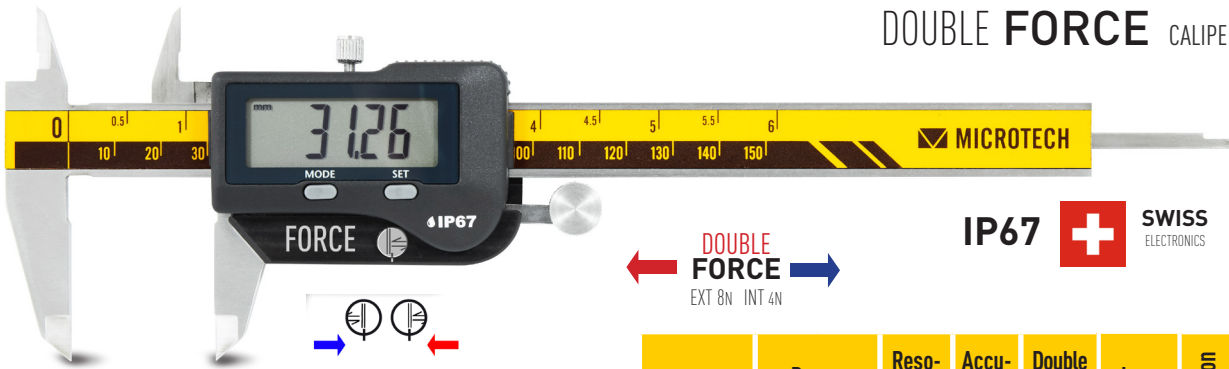

DOUBLE FORCE
EXT 8N INT 4N

IP67  **SWISS ELECTRONICS**



Item No	Range		Reso- lution	Accu- racy*	Double force	Jaws	Protection	Preset	mm/inch	Auto on/off
	mm	inch								
141078122	0-150	0-6"		± 10	8 ext	40/16		•	•	•
141078222	0-200	0-8"	0,01	± 10		50/17	IP-67	•	•	•
141078322	0-300	0-12"		± 20	4 int	60/20		•	•	•

DOUBLE FORCE CALIPER IP67 **CARBIDE JAWS**



DOUBLE FORCE
EXT 8N INT 4N

IP67  **SWISS ELECTRONICS**

**UPPER AND LOWER
CARBIDE JAWS**

Item No	Range		Reso- lution	Accu- racy*	Double force	Jaws	Protection	Preset	mm/inch	Auto on/off
	mm	inch								
141078122C	0-150	0-6"		± 10	8 ext	40/16		•	•	•
141078222C	0-200	0-8"	0,01	± 10		50/17	IP-67	•	•	•
141078322C	0-300	0-12"		± 20	4 int	60/20		•	•	•

*Accuracy on external jaws. Internal jaws and Depth according ISO13385-1